

TECHNICAL INFORMATION

Hipnotic


TECHNICAL SPECIFICATIONS ACCORDING TO EN 1307

constructie	<i>construction</i>	ISO 2424	1/10" soft cut pile
poolmateriaal	<i>yarn content</i>	ISO 2424	Spheron
rug	<i>backing</i>	ISO 2424	Ceneva® Starback
gebruiksklasse	<i>suitability</i>	EN 1307	23/33 heavy contract use
poolgewicht	<i>pile weight</i>	ISO 2424	1500 gr/m ²
totaal gewicht	<i>total weight</i>	ISO 8543	2400 gr/m ²
pooldikte	<i>pile height</i>	ISO 1766	7.4 mm
totaal dikte	<i>total thickness</i>	ISO 1765	10.2 mm
noppental	<i>tuft density</i>	ISO 1763	252000 tufts/m ²
breedte	<i>width</i>	CEN/TS 14159	ca 4 and 5 m
rapport	<i>pattern repeat</i>	CEN/TS 14159	0 mm
warmtedoorlaatweerstand	<i>thermal resistance</i>	ISO 8302	0.15 m ² K/W
brandklasse	<i>flammability</i>	ISO 13501-1	Cfl-s1
contactgeluidsisolatie	<i>impact sound insulation</i>	ISO 140-8/717-2	25 dB
structure	<i>Konstruktion</i>	ISO 2424	1/10" soft cut pile
composition	<i>Polmaterial</i>	ISO 2424	Spheron
dossier	<i>Beschichtung</i>	ISO 2424	Ceneva® Starback
classement d'usage	<i>Zusatzeignung</i>	EN 1307	23/33 heavy contract use
poids de velours	<i>Poleinsatzgewicht</i>	ISO 2424	1500 gr/m ²
poids total	<i>Gesamtgewicht</i>	ISO 8543	2400 gr/m ²
hauteur du velours	<i>Polschichtdicke</i>	ISO 1766	7.4 mm
épaisseur totale	<i>Gesamtdicke</i>	ISO 1765	10.2 mm
densité	<i>Noppenzahl</i>	ISO 1763	252000 tufts/m ²
dimensions	<i>Breite</i>	CEN/TS 14159	ca 4 and 5 m
raccord	<i>Rapport</i>	CEN/TS 14159	0 mm
résistance thermique	<i>Wärmedurchlasswiderstand</i>	ISO 8302	0.15 m ² K/W
comportement au feu	<i>Brandverhalten</i>	ISO 13501-1	Cfl-s1
isolation acoustique	<i>Trittschallverbesserungsmaß</i>	ISO 140-8/717-2	25 dB

COLOURS

102 Ice	141 Surf
122 Cool	149 Stratus
129 Sterling	169 Squirrel
133 Talpa	188 Tyrian Purple
136 Whirl	189 Secret

PRODIS RATING AND INFORMATION

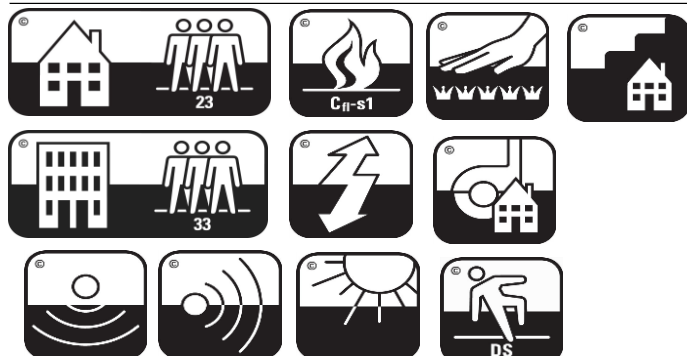

EN 14041

EN 1307



PRODIS: 4CB04D5D

DOP: 1025-124991