

TECHNICAL INFORMATION

WALDORF ASTORIA

TECHNICAL SPECIFICATIONS ACCORDING TO EN 1307


constructie	<i>construction</i>	ISO 2424	1/4" chunky level loop
poolmateriaal	<i>yarn content</i>	ISO 2424	100% wool
rug	<i>backing</i>	ISO 2424	Ceneva® Actionbac®
gebruiksklasse	<i>suitability</i>	EN 1307	23 / 33 heavy contract use
poolgewicht	<i>pile weight</i>	ISO 2424	1360 gr/m ²
totaal gewicht	<i>total weight</i>	ISO 8543	2400 gr/m ²
pooldikte	<i>pile height</i>	ISO 1766	4.9 mm
totaal dikte	<i>total thickness</i>	ISO 1765	9.1 mm
noppental	<i>tuft density</i>	ISO 1763	32,000 tufts/m ²
breedte	<i>width</i>	CEN/TS 14159	ca. 4m / ca. 5m
warmteoorlaatweerstand	<i>thermal resistance</i>	ISO 8302	0.14 m ² K/W
brandklasse	<i>flammability</i>	ISO 13501-1	Bfl-s1
contactgeluidsisolatie	<i>impact sound insulation</i>	ISO 140-8/717-2	25 dB
structure	<i>Konstruktion</i>	ISO 2424	1/4" chunky level loop
composition	<i>Polmaterial</i>	ISO 2424	100% wool
dossier	<i>Beschichtung</i>	ISO 2424	Ceneva® Actionbac®
classement d'usage	<i>Zusatzeignung</i>	EN 1307	23 / 33 heavy contract use
poids de velours	<i>Poleinsatzgewicht</i>	ISO 2424	1360 gr/m ²
poids total	<i>Gesamtgewicht</i>	ISO 8543	2400 gr/m ²
hauteur du velours	<i>Polschichtdicke</i>	ISO 1766	4.9 mm
épaisseur totale	<i>Gesamtdicke</i>	ISO 1765	9.1 mm
densité	<i>Noppenzahl</i>	ISO 1763	32,000 tufts/m ²
dimensions	<i>Breite</i>	CEN/TS 14159	ca. 4m / ca. 5m
résistance thermique	<i>Wärmedurchlasswiderstand</i>	ISO 8302	0.14 m ² K/W
comportement au feu	<i>Brandverhalten</i>	ISO 13501-1	Bfl-s1
isolation acoustique	<i>Trittschallverbesserungsmaß</i>	ISO 140-8/717-2	25 dB

COLOURS

112 Ecu	212 Parchment
122 Ivory	239 Slate
132 Spirit	243 Linen
159 Chamois	279 Smoke



PRODIS RATING AND INFORMATION

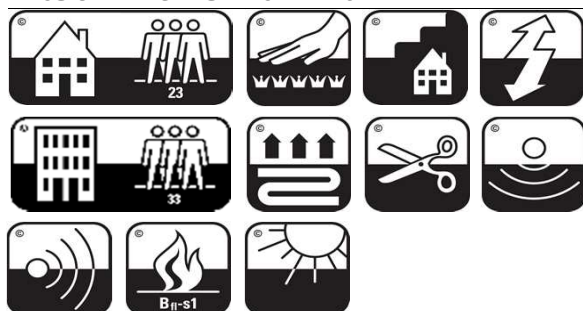

EN 14041

EN 1307



PRODIS: EBF9C89

DOP: 1025-114922

abZ: Z-156.601-1175

